



FILE NO: E230110

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass

Contact Plating: Au or Sn Over Ni


Insulator Material: Polyester (UL94V-0)

Standard: PA6T

Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

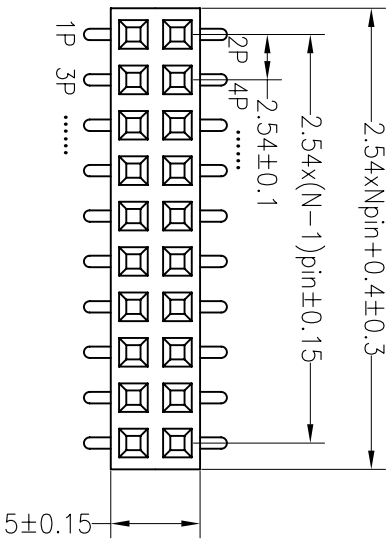



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

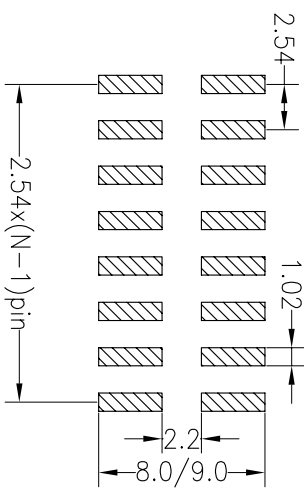

Ordering Information

2285 02 XX X X XX M Y X 01

No. of Pins Per Row: 2x40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Post: W=With Post, N=W/O Post
 Contact Plating:
 G1: Gold Flash
 G2: 1.5U" Gold
 G3: 2U" Gold
 G4: 3U" Gold
 G5: 5U" Gold
 S0: Gold Flash/Tin
 Sn: Tin
 Packaging:
 O=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap
 R=Reel+Cap
 M=Reel+Mylar
 SN: Tin

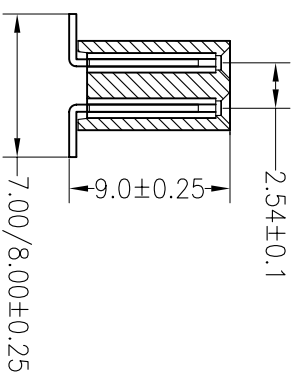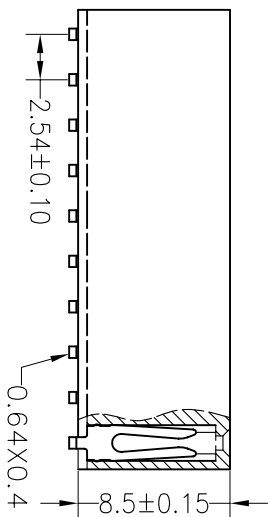

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	WZG	14.07.31	SCALE	FIT	UNIT	SIZE	SHEET	PROJ.	PART NO.	TITLE:
A0	2012.03.28	NEW DRAWING		X.X ±0.30				mm	A4	1/1				228502XXXXXXXXXX01	2.54PF H8.5mm 2xNpin SMT
1				X.XX ±0.20	CHECK										
				X.XXX ±0.10											
				Angle ±3°	APPROVE										
				DIM											
				TOL											

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992