
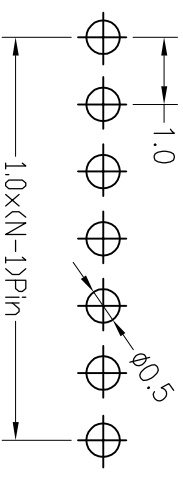


SPECIFICATIONS

Rated Current:0.75AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°c to +105°c



Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

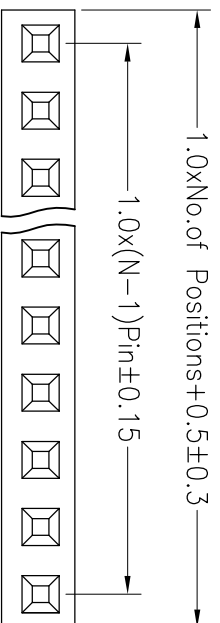

Ordering Information

2620-01 XX X N XX S U X 01

No. of Pins Per Row 1*50	Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 E=BK-PA9T F=BK-LCP	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold G5:30U" Gold S0:Gold Flash/Tin SN:Tin	Packing O=PE Bog A=Tray T=Tube P=Tube+Cap R=Reel+Cap M=Reel+Mylar
-----------------------------	---	---	---

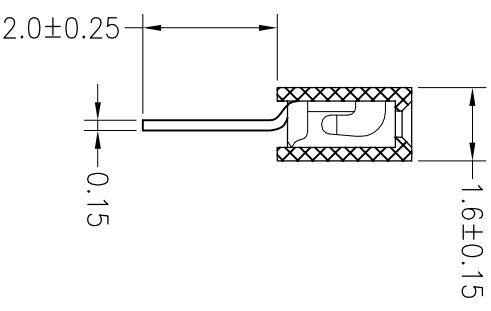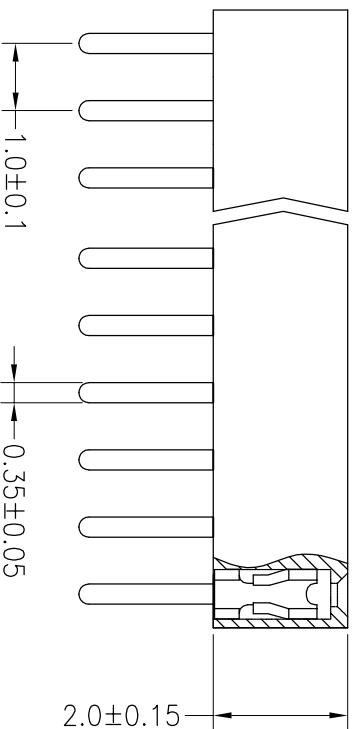

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YYuSheng	15.01.20	UNIT	mm	A4	1/1	262001XXXXXSUX01	
X.XX	±0.20	CHECK		SIZE	1.0PF H2.0mm 1xNpin 180°				
X.XXX	±0.10	APPROVE		SHEET					
Angle	±3°			PROJ.					
DIM	TOL								
REV	DATE	MODIFICATION DESCRIPTION		CHANGE				TITLE:	
A0	2015.01.20	NEW DRAWING							
1									

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892