



SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)



Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

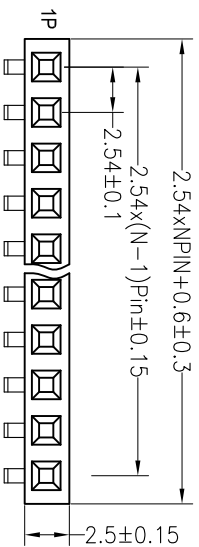

Ordering Information

2250-01 XX X N XX W U 02

No. of Pins Per Row 1*40
 Insulator Material Option
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating
 G0:Gold Flash
 G2:5U" Gold
 G3:10U" Gold
 G4:15U" Gold
 G5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin

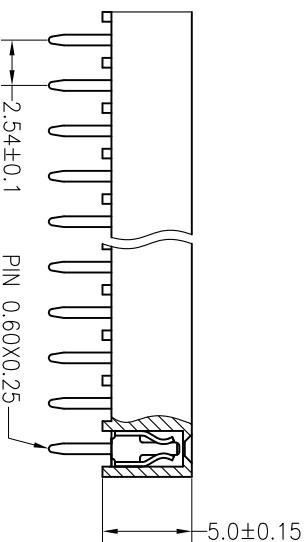

OPERATION		DRAW		SCALE		FIT	
X.X	±0.30		14.03.17	UNIT	mm	A4	1/1
X.XX	±0.20	CHECK		SIZE	A4	SHEET	1/1
X.XXX	±0.10			PROJ.	◆	PART NO. 2250-01XXXXXXWU02	
Angle	±3°	APPROVE		TITLE: 2.54PF H5.0mm 1xNpin SMT W2.50			
DIM	TOL			单边胶感脚			
CHANGE							
MODIFICATION DESCRIPTION							
NEW DRAWING							
DATE							
2014.03.17							
REV							
A0							

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992